


Optimizing the Annealing Effect of Zn/Ac Nanoparticle Synthesis on Dye Wastewater Treatment by Combination of Ultrasonic and Photocatalytic Methods

Behnoosh Khataei^{1*} and Mahdi ghaderi²

¹Department of Civil and Environmental Engineering, Iran

²Department of Mechanical Engineering, Iran

ISSN : 2832-4439

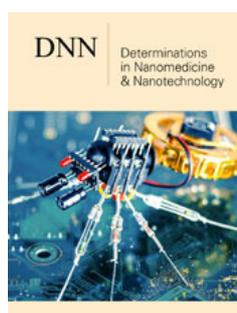

***Corresponding author:** Behnoosh Khataei, Department of Civil and Environmental Engineering, Iran

Submission: 📅 October 09, 2019

Published: 📅 October 15, 2019

Volume 1 - Issue 3

How to cite this article: Behnoosh Khataei, Mahdi ghaderi. Optimizing the Annealing Effect of Zn/Ac Nanoparticle Synthesis on Dye Wastewater Treatment by Combination of Ultrasonic and Photocatalytic Methods. *Determinations in Nanomedicine & Nanotechnology*.

1(3). DNN.000512.2019.

DOI: [10.31031/DNN.2019.01.000512](https://doi.org/10.31031/DNN.2019.01.000512)

Copyright© Behnoosh Khataei, Kanwal Iqbal, This article is distributed under the terms of the Creative Commons Attribution 4.0 International License, which permits unrestricted use and redistribution provided that the original author and source are credited.

Opinion

Many different environmental researches were done on the treatment of water, wastewater and air pollutants by different biological, physical and chemical processes. Pollution of water sources by dye pollutants from various industries such as textile, paper, rubber and plastic industries is a major environmental problem. Organic dyes cause irreparable damage to the environment due to the avoiding the light entry to water, disruption of photosynthesis, reduction of oxygen transfer to water, occurrence of eutrophication, interference with the ecology of the receiving waters, toxic effects as well as unpleasant appearance [1-18]. Different methods are used for the treatment of dye wastewater [19-25].

One of the new methods in dye wastewater treatment is oxidation using cavitation and ultrasound as well as sono-electrochemical methods. In fact, the photocatalytic oxidation process by visible or UV light in the presence of catalysts such as titanium dioxide or zinc oxides one of the advanced oxidation processes in the removal of organic pollutants, that is more efficient than other processes [26]. Also, using the ultrasonic and acoustic wave motion in the aquatic environment oscillates the molecules, which creates contractile and expansion cycles [27,28], breaking the bonds and thus accelerating the purification process.

In this study, the combination of photocatalytic and ultrasonic methods in the treatment of dye wastewater was investigated. The studied catalyst is zinc oxide which is highly resistant to light and chemical corrosion. Also, it was applied for oxidizing the wide range of organic compounds due to its non-toxicity, insolubility, ability to decompose toxic organic compounds, ability to absorb a wide range of electromagnetic waves and the photocatalytic capability for radiation.

We used the response surface methodology, the best multivariate techniques [29]. For this purpose, Visible Light Source (W), Ultrasonic Power (W), Dye Concentration (mg/L), pH, Synthesis Temperature (C), nano-particle concentration (gr/L) as variable and percentage of dye removal as the answer were considered.

In this study, a cubic reactor with dimensions of 30 * 30 * 20cm Figure 1, incandescent lamps and ultrasonic device with the power 0 to 400w and 20KHz driving frequency were used. Zn(CH₃COO) 2.2H₂O and Poly Vinyl Pyrrolidone (PVP) manufactured by Merck were used for this synthesis. The catalyst synthesis was performed at various temperatures (300, 325, 284.33, 350 and 365.66 °C). The synthesized nanoparticles had almost similar colors and were close to dark gray. Finally, the optimum temperature was determined after photocatalytic tests were performed on each of these nanoparticles in the presence of ultrasound and visible light. In this study, the model was presented based on response surface methodology tests using Design Expert 10 software and Quadratic model to evaluate the nonlinear behavior of the results. The target contaminant is methylene blue dye with the chemical formula of C₁₆H₁₈N₃Cl and molecular weight of 319.85gr/mol made by Merck, Germany. It is a cationic

dye that has a pH=3 at 20 °C and is one of the aromatic chemical dyes. For this reason, it is carcinogenic, mutagenic, often toxic and resistant to biodegradation. According to the results, the

simultaneous effect of the variables on the dye removal percentage was investigated presented in Figure 2.

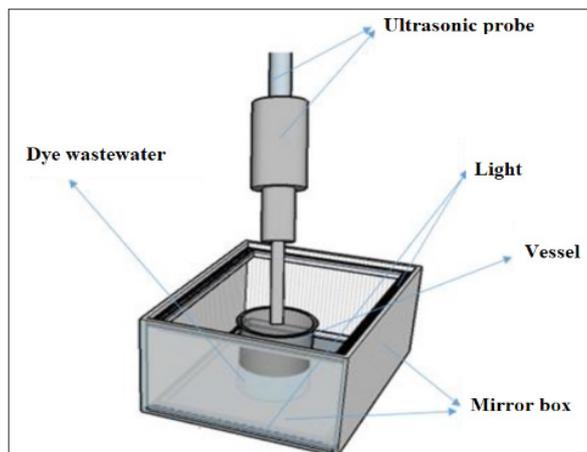


Figure 1: The schematic of used reactor.

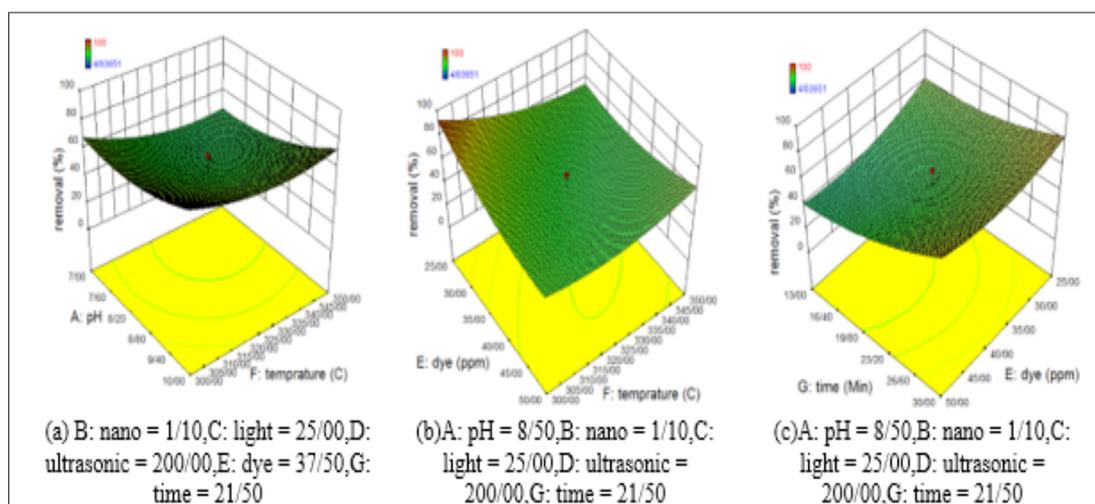


Figure 2: Simultaneous effect of variables on removal percentage.

As can be seen, the higher synthesis temperature caused the lower removal rate; The better synthesis temperature for the ZnO nanoparticles is 300 °C. The above nanoparticles also perform better at the alkaline pH (about 10) and the removal rate increases Figure 2(a). According to Figure 2(b), as the dye concentration decreases, the removal percentage also increases. By increasing the synthesis temperature, the removing ability of the nanoparticles and consequently the dye removal percentage decreased. So, the optimum synthesis temperature and contaminant concentration is 300 °C and 25ppm. On the other hand, it observed a better removal percentage in 30 minutes because the nano-particle bonds broke under irradiation and ultrasound waves and produced more negative hydroxyl. So, higher removal rates could be observed at higher times. As shown in Figure 2(c), the optimum time and dye concentrations 30 minutes 25ppm. Also, the interaction graphs showed the antagonistic effect of pH on temperature and temperature on dye concentration. But time has a synergistic effect on the color concentration pollutant removal percentage.

References

1. Wang J, Li C, Zhuang H, Zhang J (2013) Photocatalytic degradation of methylene blue and inactivation of Gram-negative bacteria by TiO₂ nanoparticles in aqueous suspension. *Food Control* 34(2): 372-377.
2. Qaderi F, Ayati B, Ganjidoust H (2011) Role of moving bed biofilm reactor and sequencing batch reactor in biological degradation of formaldehyde wastewater. *Journal of Environmental Health Science and Engineering* 8(4): 295-306.
3. Qaderi F, Babanezhad E (2017) Prediction of the groundwater remediation costs for drinking use based on quality of water resource, using artificial neural network. *J Clean Prod* 161: 840-849.
4. Qaderi F, Sayahzadeh AH, Azizi M (2018) Efficiency optimization of petroleum wastewater treatment by using of serial moving bed biofilm reactors. *J Clean Prod* 192: 665-677.
5. Babanezhad E, Amini RH, Hosseini KSS, Qaderi F (2017) Investigating nitrogen removal using simultaneous nitrification-Denitrification in transferring wastewater through collection networks with small-diameter pipes. *Water Pract Technol* 12(2): 396-405.

6. Babanezhad E, Qaderi F, Salehi ZM (2018) Spatial modeling of groundwater quality based on using Schoeller diagram in GIS base: A case study of Khorramabad, Iran. *Environ Earth Sci* 77: 339.
7. Qaderi F, Sayahzadeh AH, Azizpour F, Vosughi P (2019) Efficiency modeling of serial stabilization ponds in treatment of phenolic wastewater by response surface methodology. *International Journal of Environmental Science and Technology* 16(8): 4193-4202.
8. Ebrahimi GM, Qaderi F, Babanezhad E (2018) Prediction of mortality resulted from NO₂ concentration in Tehran by Air Q+ software and artificial neural network. *International Journal of Environmental Science and Technology* 16(3): 1351-1368.
9. Sheikholeslami Z, Yousefi KD, Qaderi F (2018) Nanoparticle for degradation of BTEX in produced water; an experimental procedure. *Journal of Molecular Liquids* 264: 476-482.
10. Sheikholeslami Z, Yousefi KD, Qaderi F (2018) Investigation of photocatalytic degradation of BTEX in produced water using γ -Fe₂O₃ nanoparticle. *Journal of Thermal Analysis and Calorimetry* 135(3): 1617-1627.
11. Faghih NE, Yousefi KD, Qaderi F (2018) An experimental study on the simultaneous phenol and chromium removal from water using titanium dioxide photocatalyst. *Civil Engineering Journal* 4 (3): 585-593.
12. Yavari SM, Qaderi F (2018) Determination of thermal pollution of water resources caused by Neka power plant through processing satellite imagery. *Environment Development and Sustainability* pp. 1-23.
13. Tamadoni A, Qaderi F (2019) Optimization of soil remediation by ozonation for PAHs contaminated soils. *Ozone: Science & Engineering* 41(5): 454-472.
14. Tavakoli MM, Qaderi F (2019) Modeling of petroleum wastewater treatment by Fe/Zn nanoparticles using the response surface methodology and enhancing the efficiency by scavenger. *Results in Physics* 15: 102566-102576.
15. Asadi P, Amini RH, Qaderi F (2019) Comparison of *Chlorella vulgaris* and *Chlorella sorokiniana* pa.91 in post treatment of dairy wastewater treatment plant effluents. *Environmental Science and Pollution Research, USA*.
16. Khalegh R, Qaderi F (2019) Optimization of the effect of nanoparticle morphologies on the cost of dye wastewater treatment via ultrasonic/ photocatalytic hybrid process. *Applied Nanoscience* pp. 1-21.
17. Qaderi F, Asadi P, Tamadoni A, Azizi M (2018) Evaluation of sustainability of development in zone 22 of Tehran by ecological footprint method. *Geography and Development Iranian Journal* 16(50): 231-245.
18. Azizpour F, Qaderi F (2019) Optimization modeling and uncertainty investigation of phenolic wastewater treatment by photocatalytic process in cascade reactor. *Environment Development and Sustainability, Netherlands*.
19. DeJohn PB, Hutchins RA (1976) *Tex Chem Color* 8: 69.
20. Patil SS, Shinde VM, (1988) Biodegradation studies of aniline and nitrobenzene in aniline plant wastewater by gas chromatography. *Environ Sci Technol* 22(10): 1160-1165.
21. More AT, Vira A, Fogel S (1989) Biodegradation of trans-1,2-dichloroethylene by methane-utilizing bacteria in an aquifer simulator. *Environ Sci Technol* 23(4): 403-406.
22. Slokar YM, Marechal LAM (1998) Methods of decoloration of textile wastewaters. *Dyes Pigments* 37(4): 335-336.
23. Ortiz I, Mosquera CA, Rodicio JL, Esplugas S (2015) Advanced technologies for water treatment and reuse. *AIChE J* 61(10): 3146-3158.
24. Jadhav SV, Bringas E, Yadav GD, Rathod VK, Ortiz I, et al. (2015) Arsenic and fluoride contaminated groundwaters: A review of current technologies for contaminants removal. *J Environ Manage* 162: 306-325.
25. Fernández CP, Vallejo M, Román SMF, Ortiz I (2015) Insight on the fundamentals of advanced oxidation processes. Role and review of the determination methods of reactive oxygen species. *J Chem Technol Biotechnol* 90(5): 796-820.
26. Kamat PS, Huehn R, Roxana N (2008) Semiconductor nanostructures for simultaneous detection and degradation of organic contaminants in water. *Photochem Photobiol Chem* 42: 37-57.
27. Ashok KM, Grieser F (1991) Ultrasonic assisted chemical processes. *Rev Chem Eng* 1: 123-129.
28. Stack JL, Carney AP, Malone BH, Wessels KT (2003) Factors influencing the ultrasonic separation of oil-in-water emulsions. *Ultrasonics Sonochemistry* 12(3): 153-160.
29. Lundstedt T, Seifert E, Abramo L, Thelin B, Nystrom A, et al. (1998) Experimental design and optimization. *Chemometr Intell Lab Syst* 42: 3-40.

For possible submissions Click below:

[Submit Article](#)