


Application of protective coatings to the surface of channels of medical instruments

Vladislav Smolentsev*, Sergey Safonov and Andrey Mandrykin

Department of Engineering Technology, Russia

ISSN : 2832-4439

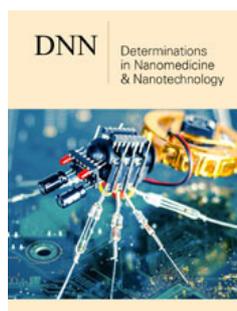

***Corresponding author:** Vladislav Smolentsev, Department of Engineering Technology, Moscow Avenue 14, Voronezh, Russia

Submission:  February 26, 2020

Published:  March 11, 2020

Volume 2 - Issue 1

How to cite this article: Vladislav Smolentsev, Sergey Safonov, Andrey Mandrykin. Application of protective coatings to the surface of channels of medical instruments. *Determinations in Nanomedicine & Nanotechnology*. 2(1). DNN.000526.2020.
DOI: [10.31031/DNN.2020.02.000526](https://doi.org/10.31031/DNN.2020.02.000526)

Copyright© Vladislav Smolentsev, This article is distributed under the terms of the Creative Commons Attribution 4.0 International License, which permits unrestricted use and redistribution provided that the original author and source are credited.

Abstract

The paper discusses the features of the manufacture of small cross-section channels with high geometric accuracy, characteristic of the nozzles for the supply of gaseous, liquid and mixed media. In transport equipment, thermal power systems are widely used nozzles with one or more channels of supply of working media, the diameter of which is measured in fractions of a millimeter. In the process of manufacturing such products requires the removal or build-up of small (within one or more microns) layers in separate holes for the supply of working media, which allows you to align the flow of liquid through all holes, to provide the required flow rate and spray the combustion products supplied, for example, for rocket engines, where up to 200 nozzles can work simultaneously. A new method of coating the inner surface of the holes of any section using a combined treatment with simultaneous action of the electric field and the radial pressure of a given value is proposed. The calculation of parameters of the tool and technological conditions, which ensures high accuracy of the flow path of the injector and the resistance of the coating when applying aggressive flammable fluids

Introduction

Build-up of quality layers in holes with a diameter of less than 2-3mm causes serious difficulties. Used electroplating processes do not always ensure the accuracy and quality of the applied layer, especially in openings with a cross section less than 1mm², and optionally, the coatings of the nanoscale. The studies carried out in recent years have made it possible to develop a new method [1] for controlled application of discrete coatings with a layer thickness of less than 0.1µm and a quality that meets the requirements of technologists when debugging the flow path of nozzles [2] for the flow and spray of working media.

The mechanism of deposition of nanolayers by galvanotechnics processing

In traditional galvanic coating it is difficult to provide compressive stresses in the surface layer, which reduces their adhesion and can cause the surface layer to crumble in the hole. This is not allowed in the case of fine-tuning and calibration of injectors, as the ingress of even microparticles in the flow of small cross-section channels can cause a violation of the supply of the working environment and, for example, the failure of aircraft engines. In [3], a method for producing high-quality nanolayers with a thickness of less than 0.1µm, the number of which can reach several thousand, is proposed. At the same time, high adhesion of the layers, the absence of microcracks, which is especially important when pumping through the channels of aggressive media (for example, acids), liquid gases with high oxidative activity (for example, oxygen), causing corrosion of the inner surface of the hole under the coating layer and the destruction of the nozzles. A feature of the Galvano mechanical method [1] is the need for rolling or rubbing a thin layer of coating with a tool made of a solid material (for example, from ceramics) with an adjustable clamping force, which allows even before the formation of the granular structure of the coating (with galvanic deposition, a large [3] to a fraction of a millimeter, grain) to create compressive stresses in the nanolayer and prevent the latter from crumbling.

Quality assurance of nano-coating

Studies conducted on an electron microscope and x-ray diffraction method showed that due to mechanical action of a solid tool can be obtained coating structure close to the metal glass, although [3] indicates that there is a microcrystalline structure of the material with a grain of up to 1.5 microns, which is up to 100 times less than the precipitation obtained by electroplating. Even taking into account the possibility of the appearance after Galvano mechanical coating of fine grain, the tightness of the coatings ensures the absence of leaks

through it until the pressure drop is more than 25MPa (test duration is 3 minutes) [3]. The surface roughness of the coating is achieved $Ra=0.18-0.2\mu\text{m}$, which is one of the main indicators of the high quality of the flow path of the nozzles operating at high flow rates and pressure drops of the pumped medium up to 20-25MPa.

The unevenness of the coating layers does not exceed 2-3% of the thickness, although this implies a high accuracy of the original channel profile, the achievement of which, as a rule, requires large costs. An interesting solution for Galvano mechanical chromium plating was obtained in [1,4], where the previously known fact of a sharp increase in the rate of chromium deposition with a decrease in the contact pressure of lapping (10 or more times) was used. However, the intensification of the process causes a significant reduction in the quality of the coating (continuity, microhardness, etc.). According to the method [1,5], it was possible to apply layers of variable thickness, filling areas with a large allowance, after which, at the recommended contact pressure, a quality layer was obtained that provides operational requirements for the product. The method [1] can be useful to restore the geometry of the channels in local violations of their geometric dimensions and to obtain high-quality flow paths, even if it is necessary to apply coatings of micro-thickness.

Processing modes and technological parameters

As a result of the studies conducted in [4] obtained the technological modes of application of nano-coating applied to galvanotechnics chrome:

- A. Current density, kA/m^2 : 10-15.
- B. Electrolyte Cr_2O_3 : 250g/l; H_2SO_4 : 2.5g/l.
- C. The temperature of the electrolyte, T_o : 330-340 °C.

D. Contact pressure, MPa: 1-2.

E. Thickness of the applied quality layer in one pass of the tool, μm : 0.2-1.0.

Technological parameters of Galvano-mechanical chrome plating of internal surfaces are studied and their quantitative assessment is received: -performance (chromium deposition rate)- 1-5 $\mu\text{m}/\text{min}$; -surface roughness, Ra - 0,018-0,63 μm ; -accuracy of coating thickness (with coating thickness of 445 μm) and 2.5 μm ; the microhardness of coating is up to 11530MPa; -residual compressive stress-100-300MPa;-high adhesion;-tightness-provided (dense non-porous coating); -maximum coating thickness -up to 800 microns; -increased wear resistance of contact pairs due to coating -1.9 -4.0 times; -flooding -within standard limits.

Technology of application of nano

In [2] it is shown that the use of technological schemes given in [3,4] is not feasible for holes of small diameter (less than 6-8mm), as to move in the hole of the tool for rolling requires a space of more than 8-10mm. Therefore, a new scheme of Galvano mechanical coating is proposed (Figure 1).

The principal difference between the scheme shown in Figure 1, from the known is the combination in a single tool (electrode-tool 2 in Figure 1) and the Dorn element (in the form of strips 3). In addition, the limited space between the tool (2) and the hole (1) requires dosing of the working medium 4; the small cross-section of the tool (2) leads to the need to limit the force (P) to the tensile strength of the tool-wire. To ensure the required contact pressure of the mandrel belts (3) with the coating (5), the cross section of the belts is reduced in the direction opposite to the movement of the tool by the coating value.

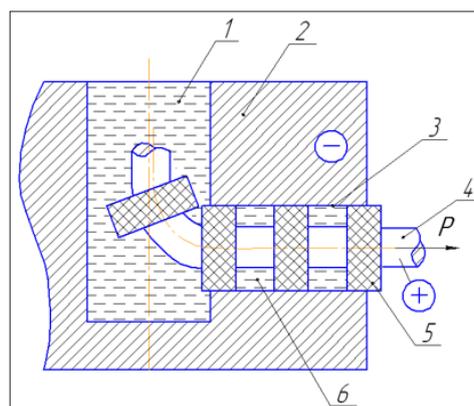


Figure 1: Scheme of application of nanocoating's of small cross-section holes (on the example of the nozzle)

1. The main channel in the housing
2. Of the injectors.
3. Channel in the nozzle injector.
4. Electrode wire.
5. Carnousie dielectric belts.
6. Liquid working medium; R- the force of pulling the electrode wire.

Calculation of the electrode-tool

Calculation of the main parameters of the electrode-tool, shown in Figure 1, includes: estimation of the number (n_1) simultaneously located in the hole of the Dorn belts

$$n_1 = \frac{L}{l} + 1, \quad (1)$$

where L is the length of the hole; l is the step between adjacent belts (usually $1/2L$).

Given the need to move the tool along the hole, the number of supports in the form of doronuma belts 3 The length of the tool (L_u) for processing the hole length L will be

$$L_u = 1,2 \cdot m \left(\frac{L}{2} + h_a \right), \quad (2)$$

where-the width of the Dorn belt; 1,2-coefficient, taking into account the technological areas of the tool; m -the number of passes of the tool. The quantity (n_a) Dornbush corbels on the tool

$$n_a = m + 1. \quad (3)$$

The diameter of the mandreling belts (d_i) is reduced along the length of the tool by the amount of the applied layer ($h_1/2$) by half the length of the hole, while $d_1 = d_0$ (d_0 is the diameter of the hole before coating). Then

$$d_i = d_{i-1} - \frac{h_1}{2} \quad (4)$$

Tool diameter-wire (d_{np}) is calculated on the basis of the need for accommodation in the space (V_{idt}) between adjacent dornowski bands of electrolyte volume sufficient for performing a chemical reaction on the deposition of the desired layer thickness ($h_1/2$) for the period of the promotion instrument for the length $L/2$. Hence the section of wire S_n

$$S_n = \frac{\pi d_{idt}}{4} \left(\frac{d_{idt}}{2} - \frac{h_1 V_0}{V_i} \right). \quad (5)$$

where V_i is the volume content of metal in it (in this electrolyte-chromium) per unit of its volume (V_0).

For the diameter of the wire tool D , find the area of its section

$$S_n = \frac{\pi d_{\bar{p}}^2}{2}. \quad (6)$$

Then

$$d_{np} = \sqrt{\frac{d_i}{2} \left(\frac{d_i}{2} - \frac{h_1 V_0}{V_i} \right)}. \quad (7)$$

The value d_{np} are rounded to standard values d_n c.

The condition of using the wire of the selected diameter is to maintain its tensile strength (σ_a) when pulling through the hole

with a force P (Figure 1), which is calculated in the design of processing modes.

$$\frac{2D}{\pi d_{\bar{p}}^2} \leq \sigma_a \quad (8)$$

If the condition (8) is not met, then the value of h_1 is reduced, thereby reducing the volume of a single coating, increasing the diameter of the wire. After finding the d_{ps} determine the interelectrode gap (S_3)

$$S_{3i} = d_{pri} - d_{ps}. \quad (9)$$

The value of S_{3i} must be at least 0.02mm, otherwise short circuits may occur. Taking into account the parameters of the tool, the technological process of nanocoating is designed. The force P of the wire tool movement in the hole (Figure 1) is calculated by [5] and adjusted by the criterion (8)

$$P = \pi P_k \frac{h_1}{2} d(1+f), \quad (10)$$

where P_k - pin power ([3] $P_k = 1-2\text{MPa}$); f - coefficient of friction, depending on the material of the belts and coating (selected by reference).

Conclusion

A. A method for obtaining high-quality nanocoating's applied to the surface of small cross-section channels is proposed. The method combines electroplating of mechanical layers of nano tole with simultaneous mechanical rolling of the coating, which allows to achieve high accuracy of holes, adhesion, wear resistance.

B. Developed design tools for combined galvanomagnetic processing. This makes it possible to calibrate small-section holes, for example, in nozzles, by successive deposition of nanocoating's and obtain high quality of each layer, which previously was not used for the small-section channel.

References

- (2004) (RF) Method of galvanic-mechanical restoration of conductive parts. Bulletin 6.
- Norman AV (2007) Technology and device for forming coatings on internal surfaces. Engineering Journal 3: 11-14.
- Chizhov MI (2000) Galvanomagnetic chrome plating of machine parts. Voronezh: VSTU p. 162.
- Jackin SY (2002) Cold galvanotecnia recovery details. Voronezh: VGTU p. 138.
- (2000) Combined processing methods. Voronezh: VGTU p. 168.

For possible submissions Click below:

Submit Article