

A Novel Method of Reducing Residual Stress: Low Transformation Temperature (LTT) Weld Filler



Yangguang Deng and Wenchun Jiang*

State Key Laboratory of Heavy Oil Processing, China

*Corresponding author: Wenchun Jiang, State Key Laboratory of Heavy Oil Processing, PR China

Submission: 📅 May 10, 2018; Published: 📅 May 16, 2018

Abstract

An innovative, alternative method to improve the undesired residual stress state during the welding process without time-consuming post weld treatments was overviewed. The LTT 'smart' alloy weld filler can effectively reduce the harmful tensile residual stress and even generate the beneficial compressive residual stress, due to the volume expansion of low temperature martensitic transformation. This paper briefly describes the mechanism and research of the formation of residual stress related to LTT weld filler.

Keywords: LTT alloy; Phase transformation; Residual stress

Introduction

One of the major problems in welded structures is the welding residual stress (WRS) caused by the inhomogeneous temperature. Many studies have proved that it is detrimental to structural integrity especially when there exist tensile residual stresses [1]. Kannengiesser et al. [2] and Murakawa et al. [3] mentioned that the tensile WRS has a great effect on the crack resistance and the service load. Ohta et al. [4] reported that the additional tensile WRS weaken the fatigue performance of welded joints. On the contrary, compressive WRS can refine martensitic grain and improve fatigue performance of weld joints [5,6]. Therefore, how to control

tensile WRS or even introduce compressive WRS to the weld is of significance to improve the integrity of weld structures.

Various conventional methods such as mechanical means (e.g., shot peening, grinding and vibration aging) and post-welding heat treatment are available for re-modifying the state of WRS in welds [7-9]. However, these techniques are cost intensive and time consuming, or even inappropriate for large-scale and inaccessible weld components. The low transformation temperature (LTT) weld filler as a novel technique to mitigate the tensile WRS was introduced in this paper, which can utilize the metallurgical characteristics.

Theoretical Basis of LTT Alloys

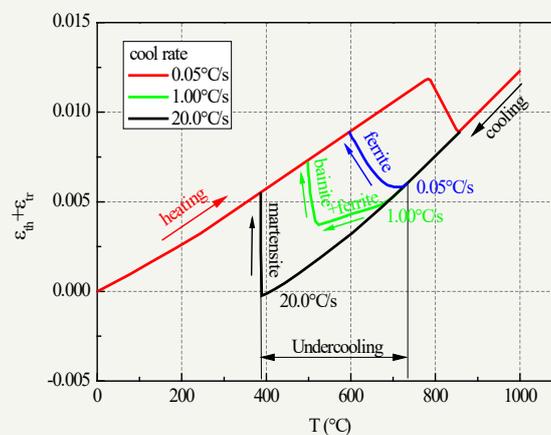


Figure 1: Illustration of internal stress evolution during heating/cooling.

Depending on the chemical composition and cooling rate of the austenitizing area, the austenite decomposition can be divided into two categories: diffusional transformation and displacive transformation. The former is ferrite or pearlite transformation at high temperature, while the latter is bainitic or martensitic transformation at low temperature [10], as illustrated in Figure 1. Due to the difference in the lattice type and the thermal expansion coefficient between austenite (face-centered cubic, FCC) and its decomposition phase (body-centered cubic, BCC), the volume expansion caused by phase transformation would be emerged [11,12]. Nevertheless, the diffusional transformation has a slight

effect on the evolution of WRS. Because the phase temperature is higher than the plastic temperature of the alloy material, resulting in the volume expansion converted into plastic deformation. Figure 2 shows that the strain caused by the martensitic transformation is the backbone to offset the shrinkage-related stresses. Thus, the martensitic transformation shows an obvious advantage for controlling the tensile residual stress. Nitschke et al. [14] concluded that martensite is the most appropriate microstructure for stress reduction. Notice that the WRS would accumulate subsequently in the range from transformation finish to ambient temperature.

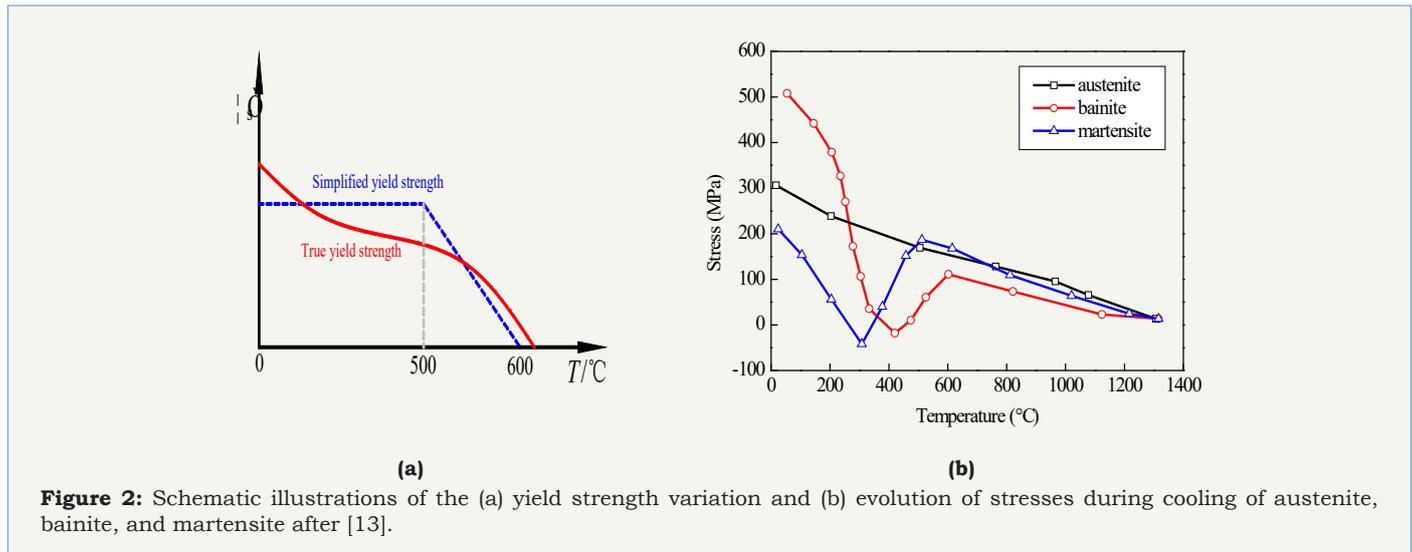


Figure 2: Schematic illustrations of the (a) yield strength variation and (b) evolution of stresses during cooling of austenite, bainite, and martensite after [13].

The LTT alloys exhibited a low M_s temperature, which is fully exhausted during cooling to ambient temperature and does not sacrifice mechanical properties. Unfortunately, some LTT alloys reduce M_s temperature by increasing carbon content, resulting in low fracture toughness [15]. Shirzadi et al. [16] solved this problem by employing other less detrimental composition to reduce M_s .

Applications of LTT 'Smart' Alloys to Reduce Residual Stress

In recent years, the investigation of the residual stress in the LTT weld was studied by many researchers. Ohta et al. [17] compared the residual stress of the LTT and conventional welding consumables by finite element simulation. The results show that the compressive residual stress occurs at the weld joint with the LTT filler. Moat et al. [18] and Lixing et al. has also proved the same conclusion that the longitudinal residual stress show a significant shift from tensile to compressive stresses due to martensitic transformation [18,19]. The Satoh test indicated that the residual stress would decrease with the decrease of the martensitic transformation temperature of the LTT weld metal [20].

In the recent decades, numerous computational approaches have been developed to describe the solid-state phase transformation kinetics. Yamamoto et al. [21] described the mechanism of reducing residual stress (LTT weld) by simulation and measurement. The studies of Murakawa et al. [3,8] showed

that the compressive residual stresses primarily depended on the transformation temperature range. Our previous study indicated that the higher M_s temperature introduces tensile stress in the weld zone due to uninterrupted cooling shrinkage, and the inter-pass temperature has a great effect on the state of the RS in the multi-pass LTT alloy welds [22]. If the inter-pass temperature is lower than M_s , the longitudinal tensile stress is generated in the weld except the last weld due to the tempering effect. If inter-pass temperature is higher than M_s , the whole weld bead is entirely in compression.

Conclusion

It has been widely recognized that the low temperature phase transformation has a significant effect on the evolution of residual stress; the LTT 'smart' alloy utilizes this effect to mitigate the tensile residual stress. The application of LTT alloy effectively improves the state of residual stress in high strength alloy steel. The LTT alloy is still at the stage of development, a large number of practical problems need to be solved, such as material mismatches and mechanical performance requirements.

Acknowledgement

The authors gratefully acknowledge the support provided by the National Natural Science Foundation of China (51575531), the Taishan Scholar Foundation (ts201511018) and the Fundamental Research Funds for the Central Universities (17CX05019).

References

1. Totten GE, Howes M, Inoue T (2002) Handbook of residual stress and deformation of steel.
2. Kannengiesser T, Kromm A, Rethmeier M (2009) S141 residual stresses and in-situ measurement of phase transformation in low transformation temperature (LTT) welding materials. *Powder Diffraction* 23(2): 188.
3. Murakawa H, Bã©Reã M, Davies CM (2010) Effect of low transformation temperature weld filler metal on welding residual stress. *Science & Technology of Welding & Joining* 15(5): 393-399.
4. Ohta A, Suzuki N, Maeda Y (2002) Fatigue strength improvement of lap welded joints by inducing compressive residual stress using low transformation temperature welding wire. *Transactions of the Society of Automotive Engineers of Japan* 33(3-4): 38-43.
5. Shiga C, Murakawa E, Matsuo Y (2014) Fatigue improvement in high-strength steel welded joints with compressive residual stress. *Welding in the World* 58(1): 55-64.
6. Barsoum Z, Gustafsson M (2009) Fatigue of high strength steel joints welded with low temperature transformation consumables. *Engineering Failure Analysis* 16(7): 2186-2194.
7. Gao YK, Wu XR (2011) Experimental investigation and fatigue life prediction for 7475-T7351 aluminum alloy with and without shot peening-induced residual stresses. *Acta Materialia* 59(9): 3737-3747.
8. Murakawa H, Beres M, Vega A (2013) Effect of phase transformation onset temperature on residual stress in welded thin steel plates. *Transactions of JWRI* 37(2): 75-80.
9. Nie Z, Wang G, Yu J (2016) Phase-based constitutive modeling and experimental study for dynamic mechanical behavior of martensitic stainless steel under high strain rate in a thermal cycle. *Mechanics of Materials* 101: 160-169.
10. Hamelin CJ, Murãnsky O, Smith MC (2014) Validation of a numerical model used to predict phase distribution and residual stress in ferritic steel weldments. *Acta Materialia* 75(7): 1-19.
11. Francis JA, Bhadeshia HKDH, Withers PJ (2007) Welding residual stresses in ferritic power plant steels. *Metal Science Journal* 23(9): 1009-1020.
12. Kang SH, Im YT (2007) Three-dimensional thermo-elastic-plastic finite element modeling of quenching process of plain-carbon steel in couple with phase transformation. *International Journal of Mechanical Sciences* 49(4): 423-439.
13. Kromm A, Dixneit J, Kannengiesser T (2014) Residual stress engineering by low transformation temperature alloys-state of the art and recent developments. *Welding in the World* 58(5): 729-741.
14. Pagel NT, Wohlfahrt H (2002) Residual stresses in welded joints-sources and consequences. *Materials Science Forum* 404-407: 215-226.
15. Ohta A, Suzuki N, Maeda Y (2002) Fatigue strength of lap welded joints of thin steel plates by low transformation temperature welding wire: variation with steel strength. *Japan Welding Society pp.* 250-251.
16. Shirzadi AA, Bhadeshia HKDH, Karlsson L (2009) Stainless steel weld metal designed to mitigate residual stresses. *Science & Technology of Welding & Joining* 14(6): 559-565.
17. Ohta A, Watanabe O, Matsuoka K (1999) Fatigue strength improvement by using newly developed low transformation temperature welding material. *Japan Welding Society* 66: 248-249.
18. Moat RJ, Stone HJ, Shirzadi AA (2011) Design of weld fillers for mitigation of residual stresses in ferritic and austenitic steel welds. *Science & Technology of Welding & Joining* 16(3): 279-284.
19. Lixing H, Dongpo W, Wenxian W (2004) Ultrasonic peening and low transformation temperature electrodes used for improving the fatigue strength of welded joints. *Welding in the World* 48(3-4): 34-39.
20. Satoh K (1972) Thermal stresses developed in high-strength steel subjected to thermal cycles simulating weld heat-affected zone. *Trans Japan Weld Soc* 3: 135-142.
21. Yamamoto J, Meguro S, Muramatsu Y (2009) Analysis of martensite transformation behaviour in welded joints of low transformation-temperature materials. *Welding International* 23(6): 411-421.
22. Jiang W, Chen W, Woo W, Tu ST, Zhang XC, et al. (2018) Effects of low-temperature transformation and transformation-induced plasticity on weld residual stresses: Numerical study and neutron diffraction measurement. *Materials & Design* 147: 65-79.



Creative Commons Attribution 4.0 International License

For possible submissions Click Here

Submit Article



Research & Development in Material Science

Benefits of Publishing with us

- High-level peer review and editorial services
- Freely accessible online immediately upon publication
- Authors retain the copyright to their work
- Licensing it under a Creative Commons license
- Visibility through different online platforms