



Review on Emergence of Giant Dielectric Response in Transition Metal Doped Graphene

**Shubhankar Mishra and Abu Jahid Akhtar****Department of Physics, Diamond Harbour Women's University, Sarisha, India****Corresponding author:** Abu Jahid Akhtar, Department of Physics, Diamond Harbour Women's University, Sarisha, India**Submission:** October 30, 2018; **Published:** November 26, 2018**Abstract**

Although, graphene has an excellent electronic and optical properties, but its dielectric property is very poor due to p-electron delocalization of graphene. From many years several strategies have been explored in order to increase its dielectric properties. In this review, we discuss the enhancement of the dielectric properties of graphene by doping transition metal in graphene. Giant value of dielectric permittivity is observed for these transition metal doped samples. We strongly believe that these materials with this extraordinary dielectric property will have enormous applications in graphene-based storage devices.


Introduction

Graphene, a two-dimensional mono layer of sp₂-bonded carbon atoms, is the most promising material in the field of physics, chemistry, material science, nanoscience and nanotechnology due to its extraordinary electrical, optical, mechanical and thermal properties [1-4]. Although graphene has huge applications in electronic devices, optoelectronic devices, energy storage devices etc. [5-7] but, its dielectric properties is very poor due to p-electron delocalization of graphene. Several strategies have been taken out to improve its dielectric properties. Doping of transition metal in graphene is one of the finest method to increase the semiconducting properties of graphene as well as it has dramatic influence in dielectric properties. According to theoretical studies, the substitutional doping can modify the band structure of grapheme

[8-10]. In this review, we give a glimpse of the change in dielectric response for transition metal doped graphene and we believe that this study will be useful in fabricating graphene-based magneto-dielectric devices.

Structure of Transition Metal Doped Graphene (TMG)

Graphene is an atomic-thin 2 D carbon sheet in which the C atoms arrange in the honeycomb structure. [1,2]. The typical atomic configuration of a defect free graphene and defective graphene are shown in Figure 1a & 1b, respectively. When transition metal is doped in graphene, the some of the carbon atoms in graphene is replaced by the transition metal atoms. Figure 1c shows the atomic configuration of transition metal doped graphene (TMG).

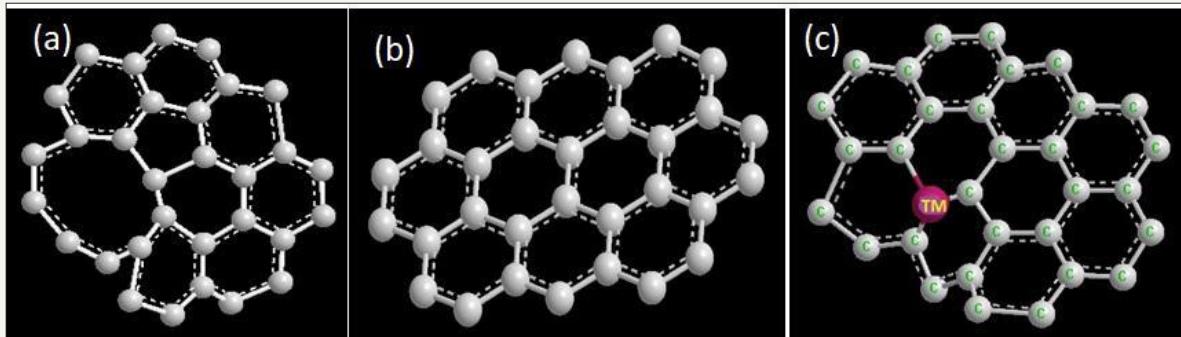**Figure 1:** Typical atomic configuration of**1a:** Defect free graphene,**1b:** Defective graphene, and**1c:** Cobalt atoms doped graphene.

Synthesis of TMG

At first modified Hummers method [11] is used for the preparation of graphene oxide (GO). This freshly prepared of GO solution is mixed with dimethyl formamide (DMF) and sonicated for 1h. Aqueous solution of cobalt chloride/ nickel chloride is then added to it and the mixture is then stirred for 30 min. At the final step, hydrazine hydrate solution is added to the mixture at 60 °C for 4h under constant ultrasonic vibration and cooled to room temperature. The mixture is then filtered and washed several times

with water, alcohol, and acetone to get rid of all unwanted reactants. The final product is dried in vacuum oven at 100 °C for 24h.

XPS study: XPS analysis have been carried out for cobalt doped graphene as shown in Figure 2 [12]. The peaks at 778.4, 793.9, and 101.4eV correspond to the B.E. of Co₂p_{3/2}, Co₂p_{1/2}, and Co 3s_{1/2} arising due to the presence of Co atom. All these peaks are shifted by an amount 0.4, 0.6, and 0.4eV respectively in respect to Co atom. These shifting indicates the doping of Co atom at vacant sites of graphene.

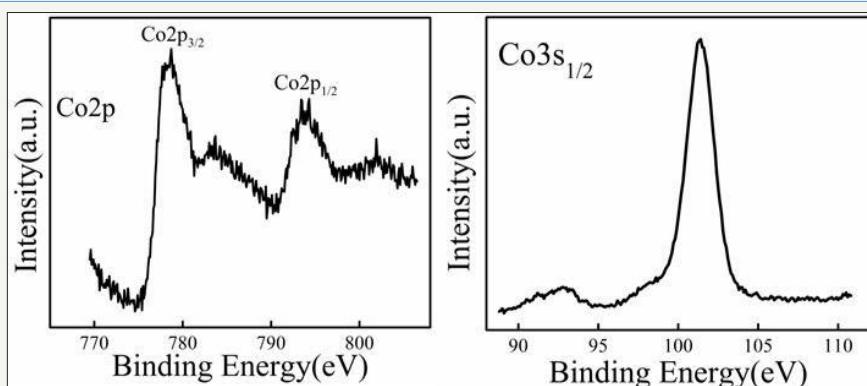


Figure 2: XPS spectra of cobalt doped graphene.

Dielectric Study of TMG

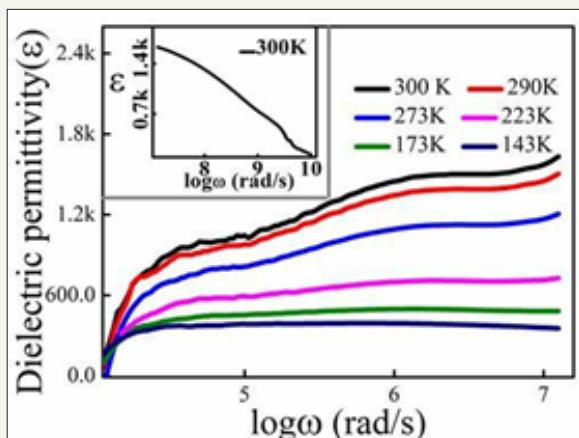


Figure 3: Variation of dielectric permittivity of Cobalt doped graphene with frequency at different temperatures.

Figure 3 shows the study of dielectric permittivity as a function of frequency for the cobalt doped graphene sample at different temperatures [12]. Interesting results are observed in the Co doped sample. Firstly, very high value of dielectric permittivity ($\epsilon \sim 2200$) is observed for this sample at 2MHz frequency. Secondly, for this sample dielectric permittivity increase with increase in frequency which is quite unusual as for most of the dielectric material dielectric permittivity decrease with the increase in frequency. The same type of behavior is also observed in case of nickel doped graphene as shown in the Figure 4 [13].

This type of behaviour of dielectric permittivity is explained by the concept of trap centers. These traps are created during the doping of transition metal atoms in graphene. These trap center has a tendency to capture conduction electrons. When dc bias is applied a very few conduction electrons are only trapped in these levels while the most of trap levels remain empty. Therefore, under dc bias the contribution of trap capacitance is very poor. However, when ac bias is applied, the probability of electrons being captured is more due to "to and fro" motion of the electrons near the traps. With increase in frequency more numbers of electrons are captured in trap levels and permittivity increases with frequency as shown in Figure 3. When all the traps are filled by the conduction electrons the capacitance becomes saturated and finally permittivity value starts to decrease with frequency as in case of usual dielectric material.

Another important observation in the dielectric study for both the samples Figure 3 & 4 is that the decrease of permittivity value with decreases in temperature. It is well known that the mobility of electron is inversely proportional to temperature so at low temperature the mobility of electrons is high enough. As a result, at low temperature the probability of the electrons being trapped

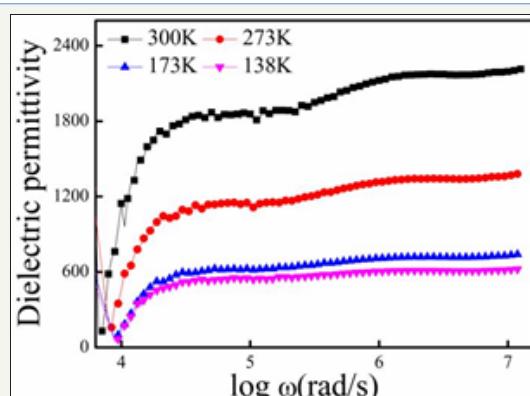


Figure 4: Variation of dielectric permittivity of nickel doped with frequency at different temperatures.

are less and hence the permittivity value decreases with decrease in temperature.

Conclusion

In summary, transition metal doped graphene emerges as a new class of materials which show giant dielectric permittivity as well as unusual dielectric behaviour where permittivity value increases with frequency. The high value of dielectric permittivity and the unusual behaviour are explained on the concept of trap states. We strongly believe that these materials with this extraordinary dielectric property will have enormous applications in graphene-based storage devices.

References


1. Chen JH, Li L, Cullen WG, Williams ED, Fuhrer MS (2011) Tunable Kondo effect in graphene with defects. *Nat Phys* 7: 535-538.
2. Berger C, Song Z, Li X, Wu X, Brown N, et al. (2006) Electronic confinement and coherence in patterned epitaxial graphene. *Science* 312: 1191-1196.
3. Lee C, Wei X, Kysar JW, Hone J (2008) Measurement of the elastic properties and intrinsic strength of monolayer graphene. *Science* 321(5887): 385-388.
4. Geim AK, Novoselov KS (2007) The rise of graphene. *Nat Mater* 6: 183-191.
5. Zhang B, Cui T (2011) An ultrasensitive and low-cost graphene sensor based on layer-by-layer nano self-assembly. *Appl Phys Lett* 98(7): 073116.
6. Cheng Z, Li Q, Li Z, Zhou Q, Fang Q (2010) Suspended graphene sensors with improved signal and reduced noise. *Nano Lett* 10(5): 1864-1868.
7. Yoo E, Kim J, Hosono E, Zhou HS, Kudo T, et al. (2008) Large reversible Li storage of graphene nanosheet families for use in rechargeable lithium ion batteries. *Nano Lett* 8(8): 2277-2282.
8. Wang X, Li X, Zhang L, Yoon Y, Weber PK, et al. (2009) N-doping of graphene through electrothermal reactions with ammonia. *Science* 324(5928): 768-771.
9. Zhang C, Fu L, Liu N, Liu M, Wang Y, et al. (2011) Synthesis of nitrogen-doped graphene using embedded carbon and nitrogen sources. *Adv Mater* 23(8): 1020-1024.
10. Lin YC, Lin CY, Chiu PW (2010) Controllable graphene N-doping with ammonia plasma. *Appl Phys Lett* 96: 133110.
11. Hummers WS, Offeman RE (1958) Preparation of graphitic oxide. *J Am Chem Soc* 80(6): 1339.
12. Akhtar AJ, Gupta A, Shaw BK, Saha SK (2013) Unusual dielectric response in cobalt doped reduced graphene oxide. *Appl Phys Lett* 103: 242902.
13. Akhtar AJ, Gupta A, Saha SK (2015) Trap induced tunable unusual dielectric properties in transition metal doped reduced graphene oxide. *RSC Advances* 5: 9594.



Creative Commons Attribution 4.0
International License

For possible submissions Click Here

[Submit Article](#)



Research & Development in Material Science

Benefits of Publishing with us

- High-level peer review and editorial services
- Freely accessible online immediately upon publication
- Authors retain the copyright to their work
- Licensing it under a Creative Commons license
- Visibility through different online platforms